

RLF-2708


2" LED MINIATURE TRIMMED
RECESSED DOWNLIGHT WITH GIMBAL TRIM



Fixture Type
Project
Notes



RLF-2708-SW5-WH

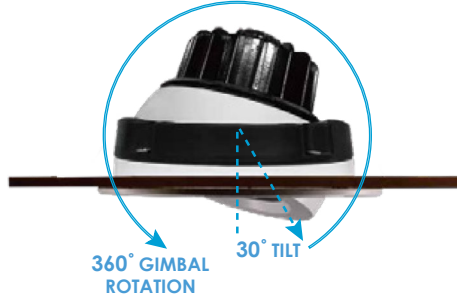

RLF-2708-SW5-WH complete set

LED Miniature Recessed Downlight with Gimbal Trim series is designed for residential and commercial applications. With integrated gimbal trim and remote driver included. Housing is not required for remodel applications, includes mounting frame with hanger bars optional for New Construction applications. 5-level field selectable color temperature is available. Power supply rated for feed through wiring.



SPECIFICATIONS

INPUT VOLTAGE	120V AC
WATTAGE	8 W
LUMENS	600 Lm
EFFICACY	75 Lm/W
CRI	90+
BEAM ANGLE	38°
DIMMING ¹	TRIAC Dimming
CUT-OUT	2-7/8" Ø

RATINGS	IC, Airtight
ENVIRONMENT	Indoor Wet
CERTIFICATIONS	cETLus, T24 Compliant
LUMEN MAINTENANCE	50,000 hours
INCLUDES	Integrated gimbal trim and remote driver
OPTIONAL	Pre-mounting frame for New Construction
WARRANTY ²	5 years


¹ Effectively dim down to 10%
² See published warranty terms for detailed information

PERFORMANCE

CCT selectable

COLOR TEMPERATURE ³	LUMEN ⁴	WATTAGE	EFFICACY	CRI
SW5 (27/30/35/40/50K) ⁵	600 Lm	8 W	75 Lm/W	90+

^{3,4} CCT within +/-10%
⁵ Switchable CCT

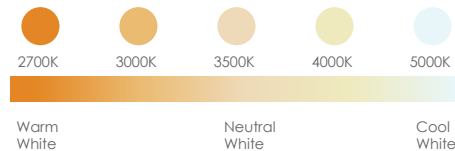

ORDERING INFO

Light Engine with LED



MODEL
RLF-2708 - CCT / CRI
SW5 - Switchable CCT
(27/30/35/40/50) / 90 CRI

TRIM FINISH
BK - Black
WH - White



RLF-2708-SW5-BK RLF-2708-SW5-WH

OPTIONAL ACCESSORY

(Sold separately)



MODEL
RLH-23354-NC-UNI
Multi-size new construction pre-mounting frame with bar. For cutout sizes 2-1/8", 2-7/8", 3-3/4" or 5-1/4"


RLF-2708

2" LED MINIATURE TRIMMED
RECESSED DOWNLIGHT WITH GIMBAL TRIM



Fixture Type
Project
Notes

TECHNICAL DRAWING

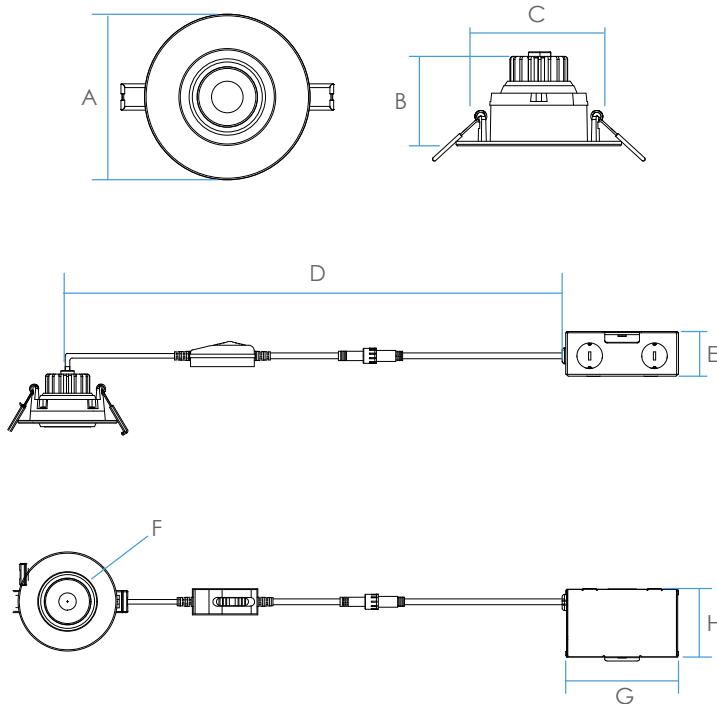

DIMENSIONS		
A	3-1/4"	83mm
B	2"	51 mm
C	3-1/8"	89 mm
D	17"	80 mm
E	1-1/2"	38 mm
F	2-7/8"	73 mm
G	4"	102 mm
H	2-1/2"	64 mm

COMPATIBLE DIMMERS

COOPER	SI06P
LEVITON	6621, 6672, IPL06-10Z
LUTRON	PD-6WCL, DVCL-153P, SFTU-5A3P, DMD-LE3-D, CTCL-153P, DV-600P